

ECOPASS


VISIANO 20

Delivering 60 klx at a distance of 0.5 m, the VISIANO 20 is the most powerful examination light from Derungs. The compact luminaire is ideally suited for everyday medical use. The VISIANO 20 stands out with homogeneous, dimmable light and excellent color rendering properties.

Product type	Examination light
Illuminance	60 klx à 0.5 m
Power	21 W
Weight	2 kg
Color rendering index CRI (Ra)	95

Composition


For the manufacturing of the VISIANO 20, steel is primarily used, particularly for the suspension arm system. Thanks to the modular design, individual components can be easily replaced, and the luminaire head can be flexibly combined with different suspension arm systems. In addition, mobile lighting solutions are also available. The long service life, low maintenance requirements, and low power consumption reduce both resource use and resulting emissions.

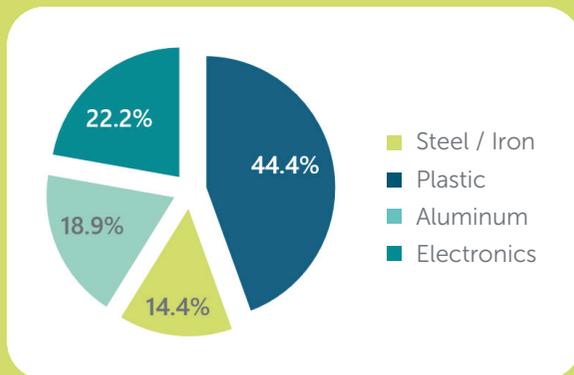

Procurement

Suppliers located near our production site are given preference. Steel components consist of 60% primary steel and 40% secondary material. Aluminum components are composed of equal shares of primary and secondary material. The plastics used are reusable. All components comply with REACH and RoHS requirements.



Secondary material content

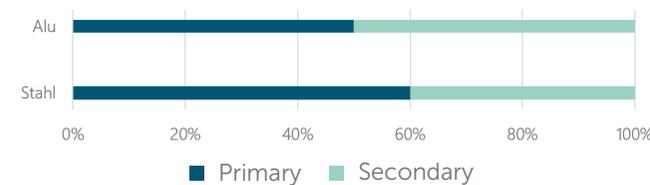

Logistics

The environmental impacts of different transport modes are well known. Accordingly, transport routes for procurement and distribution are specifically optimized to minimize CO₂ emissions. For both the sourcing and shipment of components in overseas trade, sea freight is used for approximately 80% of transports, as it represents the more environmentally friendly option.

Packaging Materials

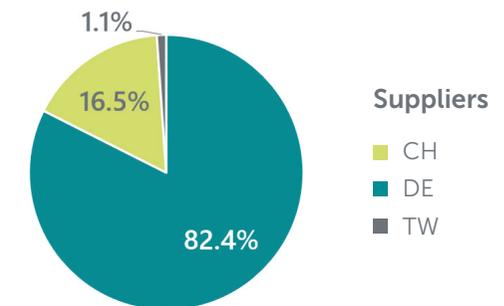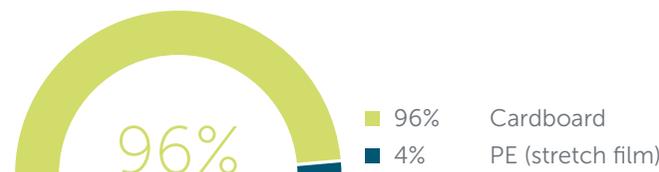


Greenhouse Gas Emissions

With a daily use of 6 hours in Switzerland, the luminaire generates approximately 84 kg of CO₂ equivalents over its total service life of 10 years (cradle to grave). The technical service life amounts to 50 000 operating hours, which corresponds to approximately 5.7 years of continuous operation.

Reduction Potential


The majority of CO₂ emissions arise from electricity consumption during the use phase. Energy-efficient devices and the use of low-carbon electricity are therefore essential. We encourage our customers to consciously select the required operating time and to switch off the luminaire when not in use.

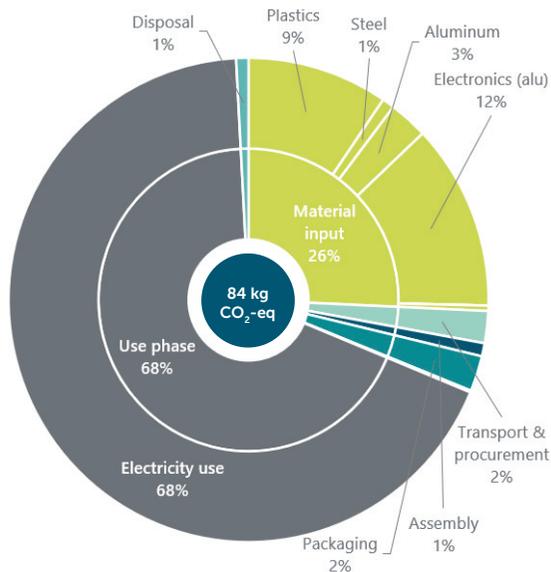

Use in Switzerland of 12 hours per day / 365 days per year over a service life of 10 years

Life Cycle

Comparison of extended use-phase scenarios between  Switzerland and the  USA

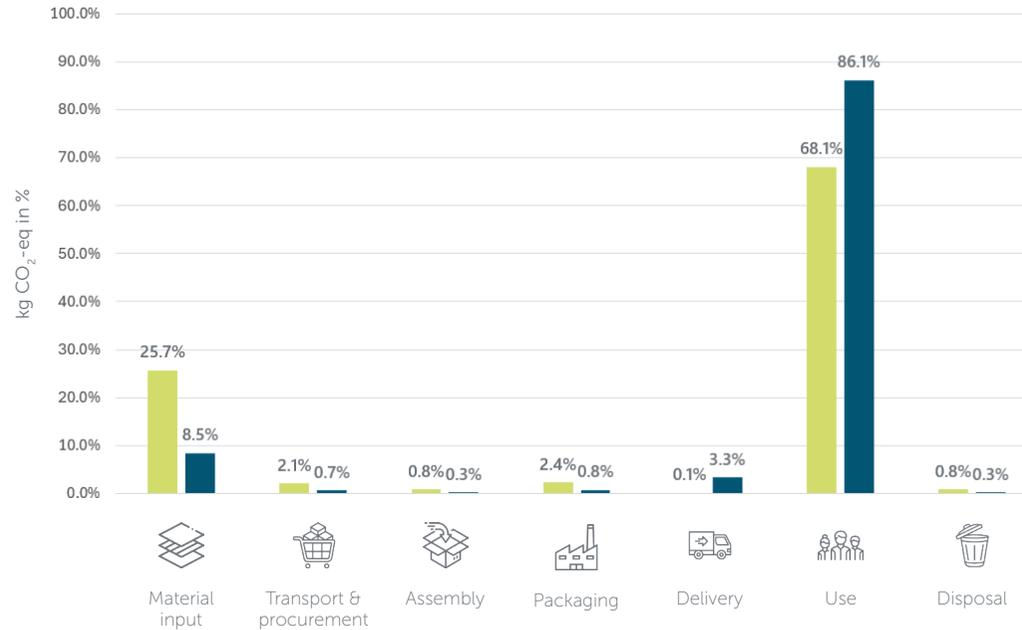

Comparison of greenhouse gas emissions of the VISIANO 20 under short and long use-phase scenarios in Switzerland, Germany, France, and the United States

Country	Use duration *	Material input	Transport & procurement	Assembly	Packaging	Delivery	Use	Disposal	Total emissions in kg CO ₂ -eq
CH	short	54.1%	4.5%	1.7%	5.0%	0.2%	32.8%	1.7%	40.1
	long	25.7%	2.1%	0.8%	2.4%	0.1%	68.1%	0.8%	84.3
DE	short	31.7%	2.6%	1.0%	2.9%	0.6%	60.2%	1.0%	68.5
	long	10.4%	0.9%	0.3%	1.0%	0.2%	86.9%	0.3%	207.9
FR	short	59.5%	4.9%	1.9%	5.5%	1.1%	25.2%	1.9%	36.5
	long	32.1%	2.7%	1.0%	3.0%	0.6%	59.6%	1.0%	67.6
USA	short	25.3%	2.1%	0.8%	2.3%	9.9%	58.8%	0.8%	85.7
	long	8.5%	0.7%	0.3%	0.8%	3.3%	86.1%	0.3%	255.8

* short: 2h / 250, long: 12h / 365

© Icons from Flaticon